
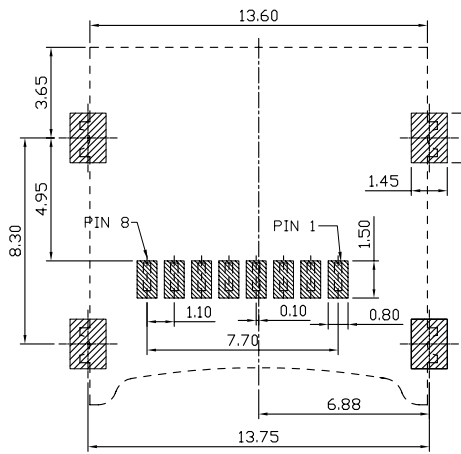


NOTE:
 1.MATERIAL:
 1.1 HOUSING: High thermoplastic,UL 94V-0
 COLOR: BLACK.
 1.2 SHELL: STAINLESS STEEL
 1.3 TERMINAL : COPPER ALLOY
 1.4 PEG : COPPER ALLOY
 1.5 HINGE : COPPER ALLOY
 2.FINISH:
 2.1 TERMINAL:
 CONTACT AREA: SELECTIVE GOLD OVER NICKEL
 SOLDER AREA: 50u"MIN. SN OVER NICKEL
 2.2 PEG AND HINGE: TIN OVER NICKEL
 3.RATING:
 OPERATING VOLTAGE: 30V
 CURRENT RATING: 1.0A
 CONTACT RESISTANCE: 50mΩ max.
 INSULATION RESISTANCE: 100MΩ MIN. 100V DC
 DURABILITY: 5000 CYCLES
 OPERATING TEMPERATURE: -20°C~+85°C

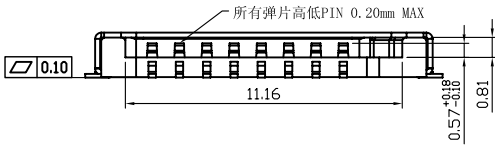


PIN NO.	PIN Assignmeng.
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

RECOMMENDED PCB LAYOUT
TOLERANCES: ±0.05

序号	名称	材质	数量
1	外壳	SUS304	1PCS
2	胶芯主体	LCP	1PCS
3	端子	C5210	1SET=8PCS
4	固定片	C5191	2PCS
5	锁卡片	C5191	2PCS

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
B	XNT-ECN-20160410002	ADD SPECIFICATIONS AND UPDATE DRAWING BY FOLLOWING PRODUCT		20160410



DIMENSIONS UNIT: mm
 UNLESS OTHERWISE SPECIFIABLE
 DIMENSION TOLERANCE
 X.X: ± 0.38
 X.XX: ± 0.25
 X.XXX: ± 0.10
 ANGULAR: ± 1°

深圳市鑫南天科技有限公司
 Shenzhen XinNanTian Technology Co., Ltd

PRODUCT NAME : microSD 掀盖式 1.85H	DRAWING : COCO	DATE: 2016/04/10
PRODUCT NO. : XNT-TF-XG185H	CHECK : JANY	DATE: 2016/04/10
DRAWING NO. : XNT-0018	APPROVED : JEFF	DATE: 2016/04/10
SCALE: 1:1	DWG ID: C D	REV. : B
		PAGE: 1 OF 1