

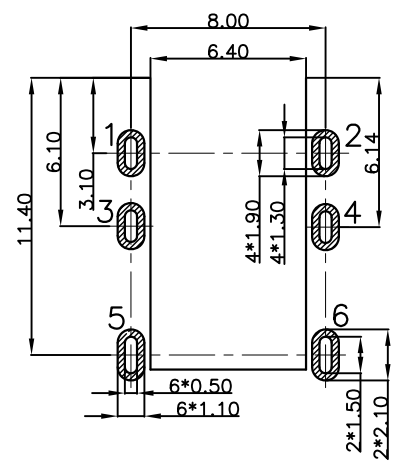

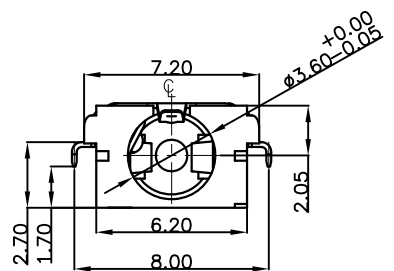
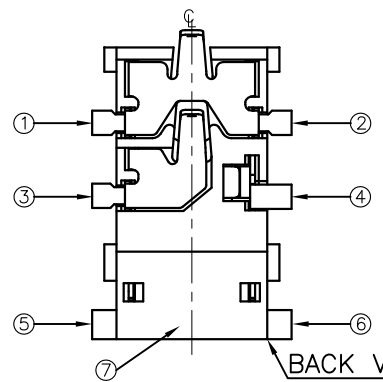
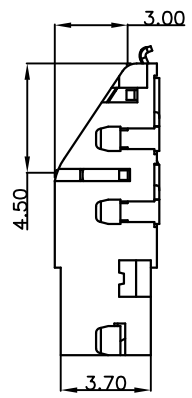





A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L  
M

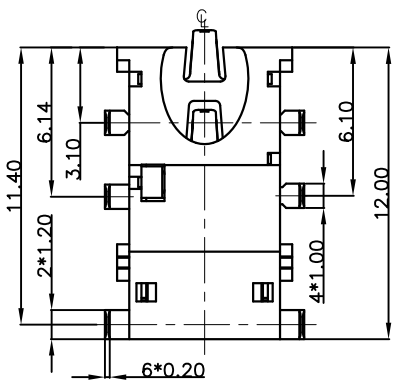

P.C.B LAYOUT TOP VIEW

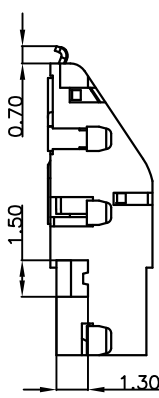

BACK VIEW

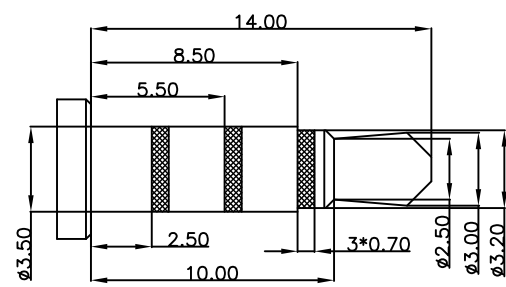

$\phi 3.50$  mm 4 POLE PLUG

NOTE:

- 1.CURRENT RATING :DC 30V\0.5A
2. CONTACT RESISTANCE:  $\leq 0.03\Omega$
3. INSULATION RESISTANCE:  $\geq 100M\Omega$
4. WITHSTANDING VOLTAGE: AC500V(50Hz)/MIN
- 5.CONNECTOR MATING AND UN-MATING FORCE:3-30N
- 6.OPERAION TEMPERATURE:-30°C ~+70°C
- 7.DUATY:5000 CYCLIES

7	HOUSING	HIGH TEMP	BLACK	UL 94V-0
6	TERMINAL 6	COPPER ALLOY		Au PLATED
5	TERMINAL 5	COPPER ALLOY		Au PLATED
4	TERMINAL 4	COPPER ALLOY		Au PLATED
3	TERMINAL 3	COPPER ALLOY		Au PLATED
2	TERMINAL 2	COPPER ALLOY		Au PLATED
1	TERMINAL 1	COPPER ALLOY		Au PLATED

CUSTOMER COPY **深圳市鑫南天科技有限公司**  
Shenzhen XinNanTian Industrial Co.,Ltd

TITLE:  $\phi 3.50$  mm PHONE JACK CONNECTOR

						Angle	$\pm 2^\circ$	DESIGN	COCO	13'/03/21	
						X	$\pm 0.35$	CHECK	JANY	3'/03/21	
						.X	$\pm 0.25$				
						.XX	$\pm 0.20$	APPRO.	JEFF	13'/03/21	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED					
	A	13'/03/21	NEW		Josun Robin						

PART NO.	XNT-RO6GA-RZLZ
PRODUCT SPEC	XNT-RJZ-0001896
FILE NAME.	XNT-RO6GA-RZL2-C
SCALE	1:1
UNIT:mm	A4  SHEET: 1 of 1