
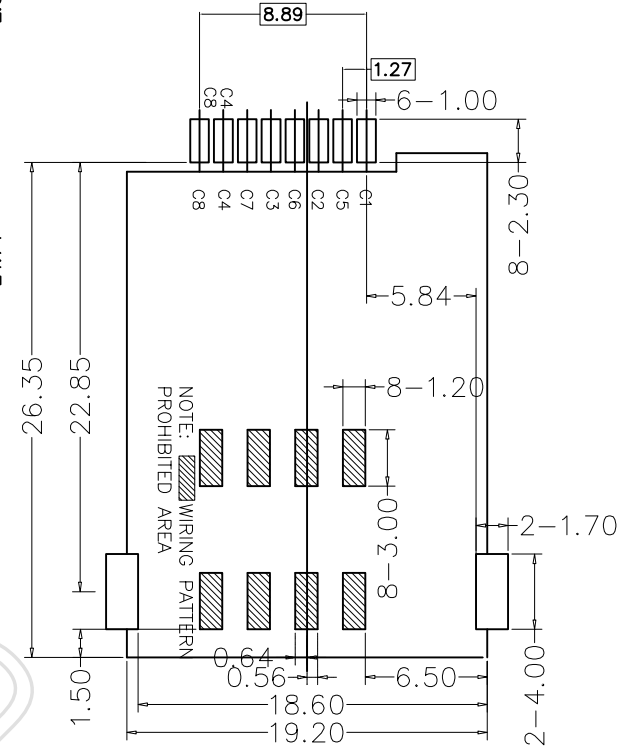
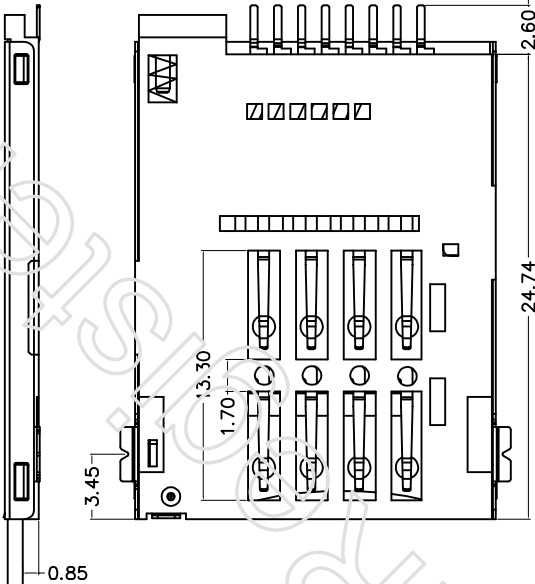


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

版权所有: 深圳市鑫南天科技有限公司, 网址: <http://www.sznantian.com>

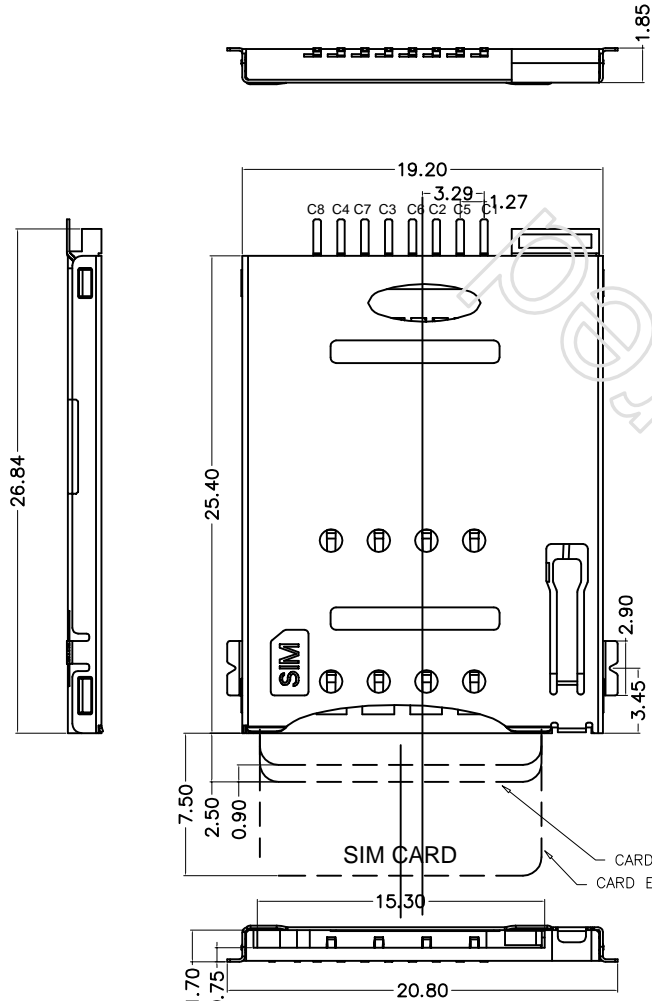

1.SPECIFICATIONS
 INSULATION RESISTANCE: 500M min.AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 Vrms
 OPERATING TEMP RANGE:-55 C+85 C
 MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:
 INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
 COLOR:BLACK
 TERMINAL: COPPER ALLOY,T=0.15mm
 SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:
 TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
 ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
 SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER LATCH

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



深圳市鑫南天科技有限公司

Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONS INIT: mm
 UNLESS OTHERWISE SPECIFIABLE

DIMENSION	TOLERANCE
X.X: ±	0.25
X.XX: ±	0.10
X.XXX: ±	0.05
ANGULAR: ±	1°

PRODUCT NAME : SIM PUSH 8P SMT	DRAWING: COCO	DATE: 2012/5/10
PRODUCT NO. : 0081CAAS10A	CHECK: JANY	DATE: 2012/5/10
DRAWING NO. : XNT-003	APPROVED: JEFF	DATE: 2012/5/10
SCALE: 1:1	DWG ID: P D	REV.: A
		PAGE: 1 of 1

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				

A
B
C
D
E
F

由 Autodesk 教育版产品制作