
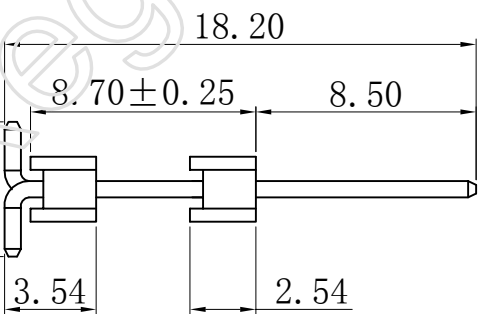



空第5, 第10P

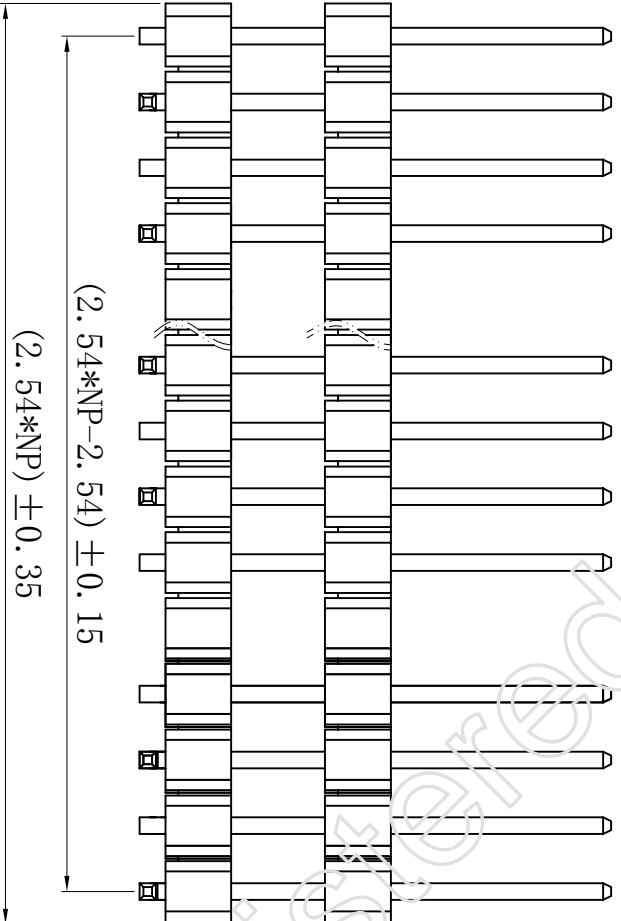

Specifications

1. Current Rating: 3Amps
2. Insulator Resistance: 1000 Megohms min.
3. Dielectric withstanding Voltage: AC 500V
4. CONTACT RESISTANCE: 30m MAX
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulator Material: Asfollows
8. Plated: Asfollows

Ordering Information

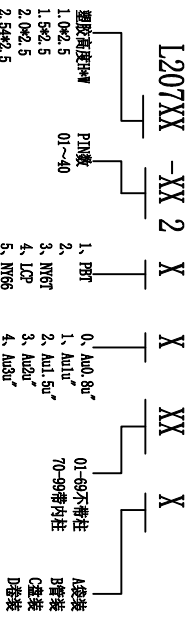

- 1. PBT
- 2. W6T
- 3. W6T
- 4. LCP
- 5. W66
- 6.
- 7. W46
- 8. W6T
- 9. W6T

A: 镀层
B: 镀层
C: 镀层
D: 镀层

版本 REV/ECN	编号 NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A					

XNT 深圳市鑫南天科技有限公司
Shenzhen XinNanTian Technology Co., Ltd

品名 TITLE:	规格 SPECIFICATION:	制图 (DR):	日期 (Date):
料号 (P/N):	审核 (CHKD):	日期 (Date):	
文件编号 (APPD):	批准 (APPD):	日期 (Date):	
比例 (SCALE):	单位 (UNIT):	张数 (SHEET):	尺寸 (SIZE):
1:1	mm	XOF	A4
			级别 (TYPE):