
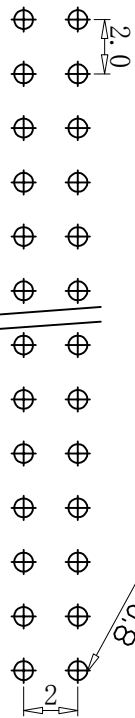
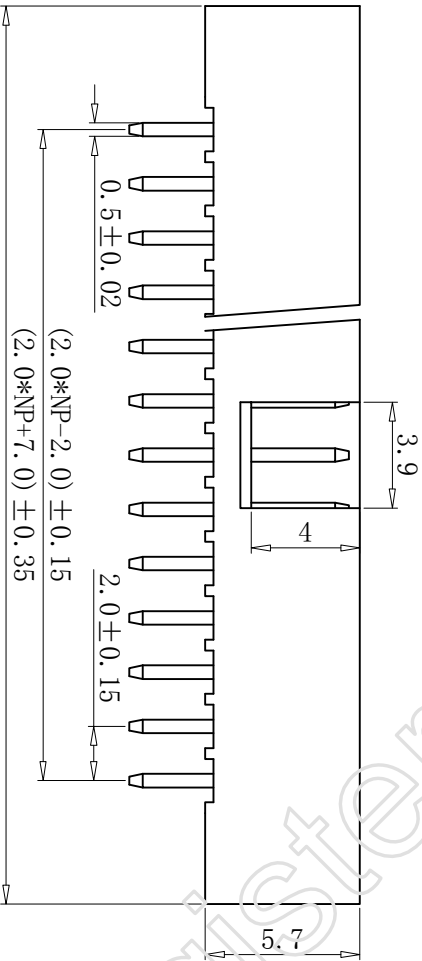


版本 REV	编号 ECN NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A					

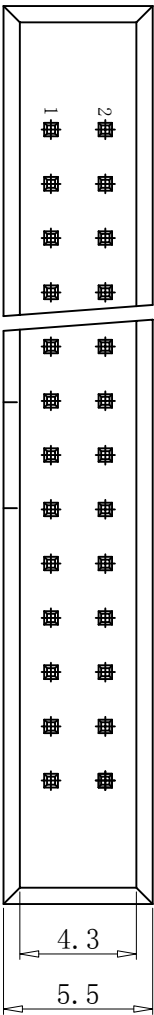


PCB LAYOUT

- Specifications
1. Current Rating: 2Amps
 2. Insulation Resistance: 1000 MΩ min.
 3. Dielectric withstanding Voltage: AC 500V
 4. Contact Resistance: 30 mΩ max.
 5. Operating Temperature: -25°C to +85°C
 7. Contact Material: Brass
 8. Insulation Material: Asfollows
 9. Plated: Asfollows

Ordering Information

XNT-L231XX -XX 0 X XX X

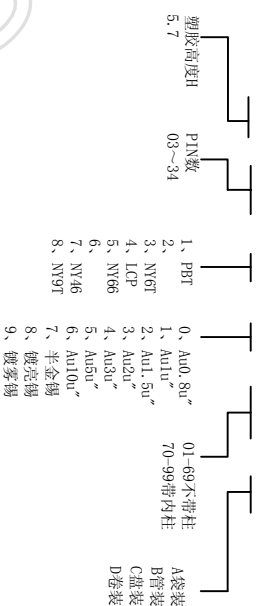

深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd		制图 WZG 日期 2016.10.20
品名 TITLE:	料号 (P/N):	日期 (Date):
规格 OTHERWISE SPECIFIED	XNT-L23157-06030XXX	日期 (Date):
LINER	文件编号 (D/N):	日期 (Date):
ANGLES	审核 (APP):	日期 (Date):
0.0 ± 0.30	比例 (SCALE):	张数 (SHEET):
0.0 ± 0.20	1:1	1/1
0.0 ± 1.0°	单位 (UNIT):	尺寸 SIZE:
0.000 ± 0.10	mm	A4
		级别 TYPE: