

RECOMMENDED PC BOARD LAYOUT
TOLERANCE: ±0.05(TOP VIEW)

NOTES:



- 1) MATERIAL:
 - 1-1 HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK
 - 1-2 SHIELDED: STAINLESS STEEL
 - 1-3 CONTACT: COPPER ALLOY
 - 1-4 SWITCH PIN: COPPER ALLOY

2) FINISH:

- 2-1 CONTACT: Au PLATING ON CONTACT AREA
(SEE P/N DESCRIPTION)
50u" MIN NICKEL UNDERPLATING OVER ALL
1u" MIN Au PLATING ON SOLD AREA.
- 2-2 SHIELDED: 1u" MIN Au PLATING ON SECURED AREA

3) PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 50V
- 3-2 WITHSTANDING VOLTAGE: AC250V R.M.S
- 3-3 CURRENT RATING: 0.5A
- 3-4 INSULATION RESISTANCE: 1000MEG.OHM MIN AT DC 250V
- 3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX
- 3-6 OPERATION TEMPERATURE: -20° TO +85°

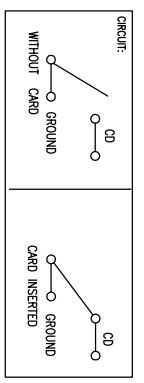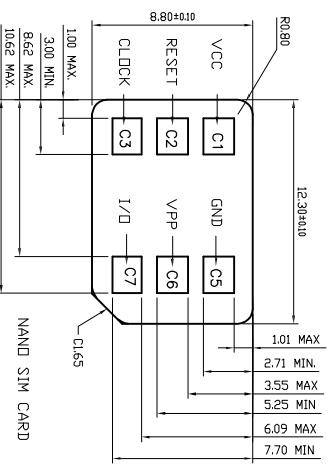

深圳市鑫南天科技有限公司
Shenzhen XinNanTian Technology Co., Ltd

TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X*. ±2° X.X° ±0.5°		DRAWN BY: C0C0 DATE: 2020-05-06		PART NAME: NANO-SIM卡检测脚	
CHECKED BY: AG DATE: 2020-05-06		DATE: 2020-05-06		PART NO.: XNT-NANO-SIM-013	
APPROVED BY: JIEFP DATE: 2020-05-06		DATE: 2020-05-06		MOLD NO.:	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4		DATE: 2020-05-06		DRAW NO.: XNT	
				SHEET NO.: 4	